Motion Detection

Installation manual

Power Supply

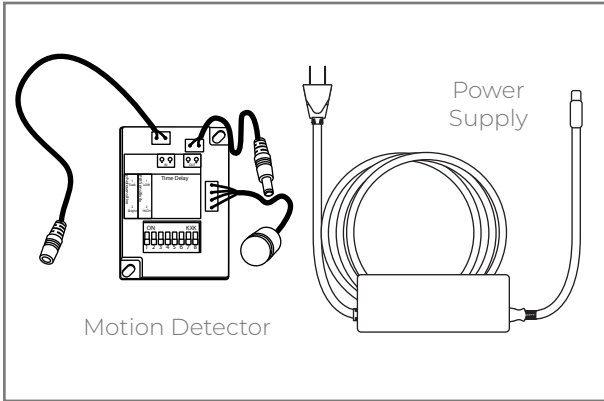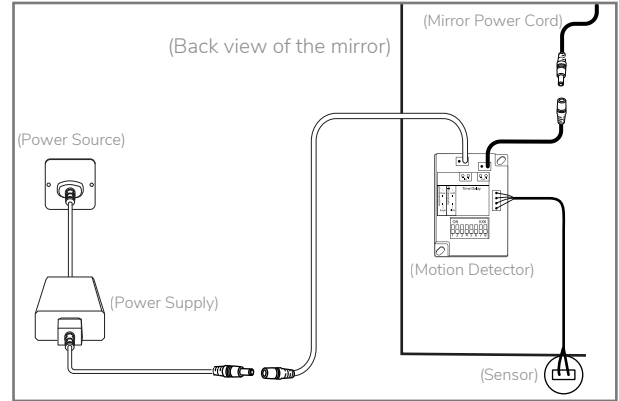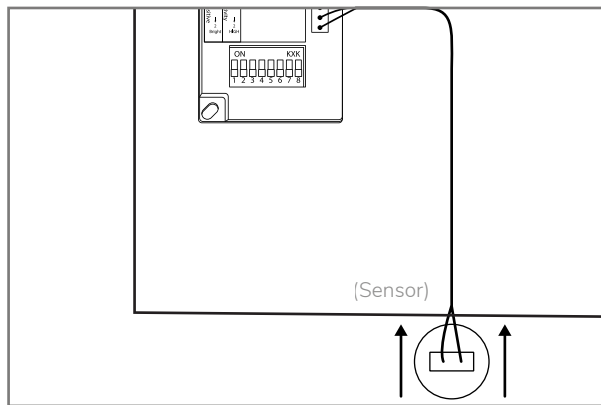Motion Detector

1 Check the items after receiving

Before installing, check to ensure that you have received all the package contents.

(Back view of the mirror)

(Mirror Power Cord)

(Power Source)

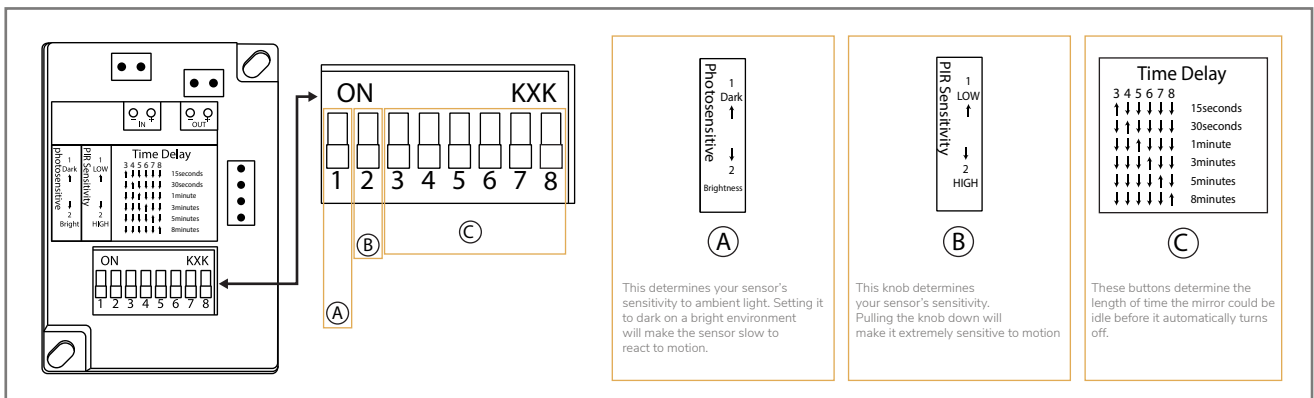(Power Supply)

(Motion Detector)

(Sensor)

2 Connect the motion detector.

Take the male end of the motion detector and connect it to the mirror's power cord. Then take the female end of the motion detector and connect it to the power supply. Lastly, plug the power supply to the power source.

(Sensor)

3 Attach the sensor under the mirror

Securely attach the round bulb (sensor) under the mirror.

Photosensitive
1 Dark
2 Brightness

(A)

This determines your sensor's sensitivity to ambient light. Setting it to dark on a bright environment will make the sensor slow to react to motion.

PIR Sensitivity
1 LOW
2 HIGH

(B)

This knob determines your sensor's sensitivity. Pulling the knob down will make it extremely sensitive to motion

Time Delay

3 4 5 6 7 8	
	15seconds
	30seconds
	1minute
	3minutes
	5minutes
	8minutes

(C)

These buttons determine the length of time the mirror could be idle before it automatically turns off.

4 Adjust to taste.

Change the sensitivity as well as the time delay according to your needs.