


Evervue RS-232 Serial Port

RS-232 is a hardwired, locking connection system that allows high-end AV components to communicate with each other rapidly and efficiently. RS-232 is the AV industry standard for High-Tech coordination using peripheral interface roles.



Contents:

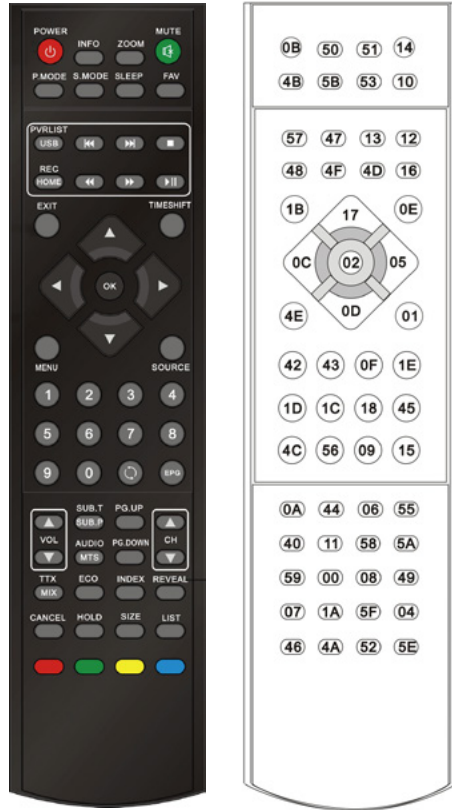

- BTN1=MUTE | A0 F0 55 FF 14 EB | 53,151
- BTN2=VOL+ | A0 F0 55 FF 0A F5 | 284,6
- BTN4=MENU | A0 F0 55 FF 4E B1 | 95,11
- BTN5=VOL- | A0 F0 55 FF 40 BF | 328,7
- BTN6=INPUT | A0 F0 55 FF 01 FE | 98,77
- BTN8=CH+ | A0 F0 55 FF 55 AA | 292,144
- BTN9=CH- | A0 F0 55 FF 5A A5 | 330,143
- BTN24=POWER | A0 F0 55 FF 0B F4 | 50,9
- BTN25=UP | A0 F0 55 FF 17 E8 | 139,76
- BTN26=DOWN | A0 F0 55 FF 0D F2 | 241,73
- BTN27=RIGHT | A0 F0 55 FF 05 FA | 192,145
- BTN28=LEFT | A0 F0 55 FF 0C F3 | 190,5
- BTN29=OK | A0 F0 55 FF 02 FD | 190,74
- BTN30=EXIT | A0 F0 55 FF 1B E4 | 102,149
- BTN32=SLEEP | A0 F0 55 FF 53 AC | 59,308
- BTN34=USB | A0 F0 55 FF 57 A8 | 201,238
- BTN35=ZOOM | A0 F0 55 FF 51 AE | 59,242
- BTN36=PREVIOUS | A0 F0 55 FF 47 B8 | 290,239
- BTN37=NEXT | A0 F0 55 FF 13 EC | 289,312
- BTN38=PLAY | A0 F0 55 FF 16 E9 | 241,237
- BTN39=STOP | A0 F0 55 FF 12 ED | 242,308
- BTN40=FORWARD | A0 F0 55 FF 4D B2 | 239,386
- BTN41=BACKWARD | A0 F0 55 FF 4F B0 | 290,385
- BTN42=INFO | A0 F0 55 FF 50 AF | 160,307
- BTN43=P.MODE | A0 F0 55 FF 4B B4 | 98,307
- BTN44=S.MODE | A0 F0 55 FF 5B A4 | 10,379
- BTN45=FAV | A0 F0 55 FF 10 EF | 61,375
- BTN46=HOME | A0 F0 55 FF 48 B7 | 162,240
- BTN47=TIMESHIFT | A0 F0 55 FF 0E F1 | 162,381
- BTN48=1 | A0 F0 55 FF 42 BD | 386,4
- BTN49=2 | A0 F0 55 FF 43 BC | 386,71
- BTN50=3 | A0 F0 55 FF 0F F0 | 386,138
- BTN51=4 | A0 F0 55 FF 1E E1 | 428,3
- BTN52=5 | A0 F0 55 FF 1D E2 | 427,71
- BTN53=6 | A0 F0 55 FF 1C E3 | 427,138
- BTN54=7 | A0 F0 55 FF 18 E7 | 470,3
- BTN55=8 | A0 F0 55 FF 45 BA | 470,71
- BTN56=9 | A0 F0 55 FF 4C B3 | 470,136
- BTN57=0 | A0 F0 55 FF 56 A9 | 512,72
- BTN58=RETURN | A0 F0 55 FF 09 F6 | 511,3
- BTN59=EPG | A0 F0 55 FF 15 EA | 512,135
- BTN60=SUB.P | A0 F0 55 FF 44 BB | 467,229
- BTN61=MTS | A0 F0 55 FF 11 EE | 466,304
- BTN62=PG.UP | A0 F0 55 FF 06 F9 | 200,308
- BTN63=PG.DOWN | A0 F0 55 FF 58 A7 | 198,382
- BTN64=MIX | A0 F0 55 FF 59 A6 | 465,370
- BTN65=ECO | A0 F0 55 FF 00 FF | 101,241
- BTN66=INDEX | A0 F0 55 FF 08 F7 | 425,229
- BTN67=REVEAL | A0 F0 55 FF 49 B6 | 424,300
- BTN68=CANCEL | A0 F0 55 FF 07 F8 | 426,372
- BTN69=HOLD | A0 F0 55 FF 1A E5 | 385,372
- BTN70=SIZE | A0 F0 55 FF 5F A0 | 383,300
- BTN71=LIST | A0 F0 55 FF 04 FB | 385,230
- BTN72=RED | A0 F0 55 FF 46 B9 | 510,226
- BTN73=GREEN | A0 F0 55 FF 4A B5 | 512,304
- BTN74=YELLOW | A0 F0 55 FF 52 AD | 511,375
- BTN75=BLUE | A0 F0 55 FF 5E A1 | 508,443


COM Port Setting: (immutable)

Baud Rate: 38400

Parity Check: None

Data Bits: 8

Stop Bit: 1

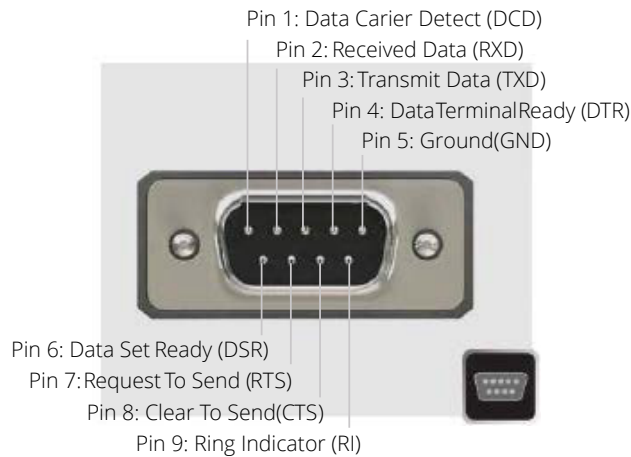

This component makes installation easy for Smart Home Automation. RS-232 is a hardwired, locking connection system that allows high-end AV components to communicate with each other rapidly and efficiently. RS-232 is the AV industry standard for High-Tech coordination using peripheral interface roles.

COMMAND TYPE 1(Transmit)

Short command for less functions(<=255 commands) and less address (<= 254)

COMMAND SEQUENCE

A0 F0 55 **ADR** **CMD** CH

A0 = head(immutable)

F0 55 = sync(immutable)

ADR = address.(address from 0x01 to 0xFE, if just one equipment, set it to 0xFF)

CMD = command.

CMD+CH=0xFF

The time of the command sequence must <500ms

The interval time of two continuous must command sequence >500ms

COMMAND TYPE 2(Transmit)

Short command for less functions(<=255 commands) and less address (<= 254)

COMMAND SEQUENCE

A0 F0 55 **ADR** IR1 IR2 **CMD** CH

A0 = head(immutable)

F0 55 = sync(immutable)

IR1/IR2 it is remote head code(2 Bytes)

ADR = address.(address from 0x01 to 0xFE, if just one equipment, set it to 0xFF)

CMD = command.

CMD+CH=0xFF

The time of the command sequence must <500ms

The interval time of two continuous must command sequence >500ms

COMMAND TYPE 1(Receive)

Short command for less functions(<=255 commands) and less address (<= 254)

COMMAND SEQUENCE

A0 F0 55 **ADR** **CMD** CH

A0 = head(immutable)

55 F0 = sync(immutable)

ADR = address.(address from 0x01 to 0xFE, if just one equipment, set it to 0xFF)

CMD = command.

CMD+CH=0xFF

The time of the command sequence must <500ms

The interval time of two continuous must command sequence >500ms

COMMAND TYPE 2(Receive)

Short command for less functions(<=255 commands) and less address (<= 254)

COMMAND SEQUENCE

A0 F0 55 **ADR** IR1 IR2 **CMD** CH

A0 = head(immutable)

55 F0 = sync(immutable)

IR1/IR2 it is remote head code(2 Bytes)

ADR = address.(address from 0x01 to 0xFE, if just one equipment, set it to 0xFF)

CMD = command.

CMD+CH=0xFF

The time of the command sequence must <500ms

The interval time of two continuous must command sequence >500ms